

# Near-maximal two-photon entanglement for quantum communications at 2.1 $\mu\text{m}$

Adetumise C. Dada,<sup>1,\*</sup> Jędrzej Kaniewski,<sup>2</sup> Corin Gawith,<sup>3</sup> Martin Lavery,<sup>1</sup> Robert H. Hadfield,<sup>1</sup> Daniele Faccio,<sup>4</sup> and Matteo Clerici<sup>1</sup>

<sup>1</sup>*James Watt School of Engineering, University of Glasgow, Glasgow G12 8QQ, UK.*

<sup>2</sup>*Faculty of Physics, University of Warsaw, Pasteura 5, 02-093 Warsaw, Poland*

<sup>3</sup>*Covesion Ltd., Unit A7, The Premier Centre, Premier Way, Romsey, Hampshire SO51 9DG, UK.*

<sup>4</sup>*School of Physics and Astronomy, University of Glasgow, Glasgow G12 8QQ, UK.*

Owing to a reduced solar background and low propagation losses in the atmosphere, the 2- to 2.5- $\mu\text{m}$  waveband is a promising candidate for daylight quantum communication. This spectral region also offers low losses and low dispersion in hollow-core fibers and in silicon waveguides. We demonstrate for the first time the capability for entanglement-based quantum key distribution (QKD) at 2.1  $\mu\text{m}$ , obtaining a positive secure-key rate (0.417 bits/pair, with a quantum bit error rate of 5.43%) using near-maximally entangled photon pairs in a proof-of-principle device-independent QKD scenario.


Entanglement remains a key ingredient for many emerging quantum technologies based on communication and information processing protocols such as quantum key distribution (QKD)[1–3], superdense coding [4], and state teleportation [5]. The workhorses for the implementation of these protocols until now have been light sources at visible and telecom wavelengths based on both guided-wave and free-space transmission. In recent years, satellite-to-ground links have emerged as the most promising option for long-distance QKD [6–11]. A critical challenge for satellite-to-ground QKD is the limited operability in daylight due to excess background in the telecom and visible bands [12]. As a result, most demonstrations to date rely on nighttime operation, with only a few exceptions [13]. Moreover, entanglement-based or device-independent approaches in daylight are still to be demonstrated. In addition, the push towards satellite-based communication networks is leading to a paradigm shift in QKD towards device-independent implementations that must support both fibre and free-space optical links.

The 2- to 2.5- $\mu\text{m}$  spectral region is rapidly becoming a highly promising optical telecommunications band with significant advantages over the traditional telecom C-band (1550 nm), making it crucial to develop and investigate quantum sources and measurement capabilities in this waveband. For example, the 2- $\mu\text{m}$  band has been demonstrated to have minimal losses in the hollow-core photonic band gap fiber (HCF) [14], which is an emerging transmission-fiber alternative due to its ultra-low nonlinearity, and providing the lowest available latency. In addition, although the 2- $\mu\text{m}$  band enjoys similar atmospheric transparency as the telecom C-band, the solar background is up to 3 times lower [15], making it especially promising for free-space optical communications during daytime. To illustrate how using the 2- $\mu\text{m}$  band could improve the limited operability of device-independent (DI) QKD at daytime, we model the secure key rate using the results in Ref. [16, 17] as function of detection efficiency versus the number of photons per pulse,

at different carrier wavelengths by using the solar flux densities with a 100-nm band around the carrier wavelengths. Fig. 1 shows a significant parameter region in which positive secure key rates which are unachievable at 1.55  $\mu\text{m}$  and 770 nm become achievable at 2.1  $\mu\text{m}$ . In addition, an entangled photon source has been developed [18] and low noise superconducting photon counting detectors have become available [19], opening up this spectral window for quantum optics and quantum communications.

The main approaches for implementing QKD are based on the BB84 and the Ekert91 protocols [20, 21]. In both cases, an important metric is the quantum bit error rate (QBER), i.e., the ratio of wrong bits to the total number of transmitted bits, and it contains information about the existence of an eavesdropper and how much they may know. Entanglement-based quantum information protocols approach optimal performance when the resource state is known, and in particular, when it approaches a maximally entangled state. For DIQKD, the resource state must demonstrate a combination of low QBER and sufficiently large Bell inequality violation to yield a positive (i.e., greater-than-zero) secure key rate [17]. Previously, quantum interference and polarization entanglement in free space with CHSH-Bell inequality violation by 2.2 standard deviations [18] and quantum interference with heralded single photons on chip [22] was demonstrated in the 2- $\mu\text{m}$  band. However, the capability for general projective measurements and full characterization of single and entangled qubit states in the mid-infrared region has not previously been demonstrated. These capabilities are crucial for the implementation of advanced quantum information tasks. Moreover, a positive secure key rate, which demonstrates the viability of entanglement-based QKD protocols, has not yet been shown.

In this work, we demonstrate quantum state tomography of two-photon states in the mid-infrared spectral region, and show near-maximal entanglement through violation of the CHSH-Bell inequality with more than an

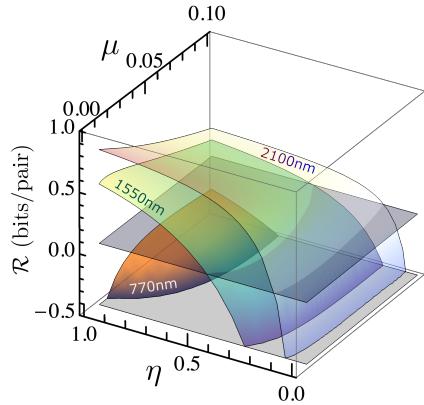


**FIG. 1. Lower bounds on secure key rates for DIQKD at  $2.1\ \mu\text{m}$ ,  $1.55\ \mu\text{m}$  and  $770\ \text{nm}$  in free-space at daytime.** Comparison of the lower bounds on the secure key rates  $\mathcal{R}$  for DIQKD as functions of the number of photons per pulse  $\mu$  and total channel efficiency  $\eta$  at different wavelengths simulated based on solar photon flux density data at sea level and infrared atmospheric transmission spectrum in Ref [15]. This simulation is based on the theoretical results in Refs. [16, 17] and solar background flux measured in Ref. [24].

order of magnitude improvement over previous experiments, in terms of the number of standard deviations above the classical bound [18]. Most importantly, we give the first experimental proof of a positive secure key rate in the mid-infrared region in a DIQKD setting. We have shown that our source is capable of violating a Bell inequality for which a weak form of self-testing has recently been proven [23]. This new type of self-testing allows the certification of the entangled state without certifying the implemented measurements. This is of fundamental interest since, previously, self-testing of quantum states or randomness certification had only been shown for rigid Bell inequalities.

We generated the photon pairs using spontaneous parametric down-conversion (SPDC) in a second order nonlinear crystal with a configuration similar to that in our previous work [18]. As illustrated in Fig. 2, the nonlinear crystal is pumped with a ytterbium-based ultrashort-pulse fiber laser (Chromacity Ltd.) at a carrier wavelength of  $\sim 1040\ \text{nm}$ , a repetition rate of  $80\ \text{MHz}$ , and a pulse duration of  $130\ \text{fs}$ . Here, we used periodically poled, magnesium-doped lithium niobate crystals (MgO-PPLN; Covesion Ltd.), with lengths  $1\ \text{mm}$  and  $0.3\ \text{mm}$  cut for type-0 and type-2 phase matching, respectively. The crystals were fabricated with different poling periods which were tested at different temperatures to determine the configuration that maximizes the signal and idler photon count rates in each case. The optimal specifications were poling period of  $31.4\ \mu\text{m}$  ( $9.486\ \mu\text{m}$ ) and a stable temperature of  $90 \pm 0.1^\circ\text{C}$  ( $150 \pm 0.1^\circ\text{C}$ ) for the type-0(2) crystal.


For the type-0 experiment, where the polarization of

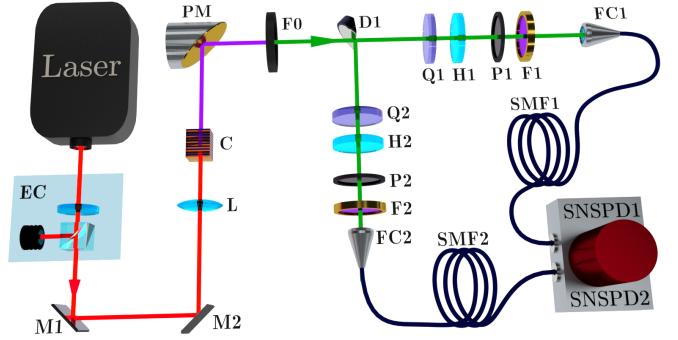

**FIG. 2. Experimental setup for generation and full tomography of polarization entangled photons at  $2.1\ \mu\text{m}$ .** The setup consists of mirrors ( $M1/2$ ), attenuator/energy controller (EC), lenses ( $L1$  and  $FC1/2$ ), the PPLN crystal (C), Ge filter ( $F0$ ), a D-shaped pickoff mirror (D), 50-nm-passband filters ( $F1/2$ ), halfwave plates ( $H1/2$ ), quarter-wave plates ( $Q1/2$ ), polarizers ( $P1/2$ ), single mode fibers ( $SMF1/2$ ), superconducting nanowire single-photon detectors ( $SNSPD1/2$ ).

the pump photon is the same as that of the daughter photons, we pumped with vertically polarized photons,  $|V\rangle_p$  to obtain the separable two-photon state  $|V\rangle_s \otimes |V\rangle_i$  at  $2080\ \text{nm}$ , where  $\otimes$  denotes tensor product, and we use  $|X\rangle_s \otimes |Y\rangle_i \equiv |X, Y\rangle$  in what follows. On the other hand, in the type-2 configuration, we pumped with horizontally polarized photons  $|H\rangle$  to obtain the entangled two-photon singlet state  $|\psi^-\rangle = \frac{1}{\sqrt{2}}(|H, V\rangle - |V, H\rangle)$  at  $2080\ \text{nm}$ . As illustrated in Fig. 2, the output of the crystal was then recollimated using a parabolic mirror and passed through an antireflection-coated germanium long-pass filter,  $F0$ , (cut on  $\sim 1.85\ \mu\text{m}$ ) to reject the intense laser excitation light, thereby ensuring the purity of the measured state. Also, the photons were further filtered using 50-nm bandpass filters,  $F1$  and  $F2$ , in each arm to select the degenerate SPDC photon pairs at  $2080\ \text{nm}$  before final detection. After the long-pass filter, the signal and idler photons were separated in the far field using a D-shaped pick off mirror,  $D1$ . The signal (idler) photons were then passed through a quarter-wave plate,  $Q1$  ( $Q2$ ); a half-wave plate,  $H1$  ( $H2$ ); and a fixed horizontal polarizer  $P1$  ( $P2$ ). This allowed projection onto any general polarization basis state. Such access to the entire Hilbert space is required for general projective measurements, and in particular for full quantum state tomography. Finally, a lens (18.4-mm focal length) coupled the photons in each arm into a single-mode fiber (SM2000), which in turn coupled the photons to high-efficiency superconducting nanowire single-photon detectors (SNSPD; Single Quantum).


To give insight on the pumping conditions for the optimum tradeoff between the count rates and the state purity, we performed measurements of the coincidence-to-accidentals ratio (CAR) at various pump powers, as

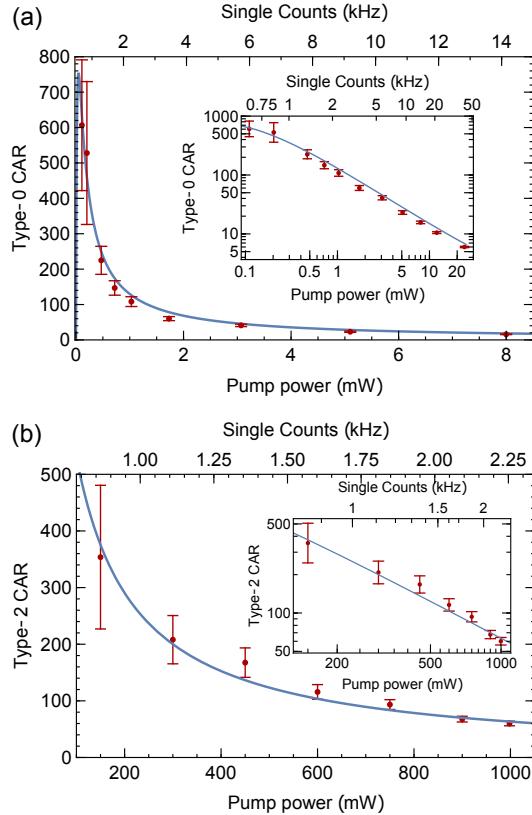

**FIG. 3. Coincidence-to-accidentals Ratios (CAR):** Measured coincidence-to-accidental ratio (CAR) as a function of the averaged single count rates between detectors 1 and 2, for the (a) type-0 and (b) type-2 sources. The insets show the plots on logarithmic scales. The ‘single’ counts include the detector dark count rates of 500 Hz in each arm.

shown in Figs 3 (a,b). For the type-0 case, we projected the state onto  $|V, V\rangle$  and measure a maximum CAR of  $607 \pm 185$ , which is  $\sim 3$  times the state-of-the-art. This improvement is in part due to the use of SNSPDs with higher efficiencies. Similarly, for the type-2 crystal, by projecting the entangled state to the  $|H, V\rangle$ , we measure CARs up to  $354 \pm 127$  (projection onto  $|V, H\rangle$  gives identical results). By fitting a standard model [18, 25] to the data as done in [18], we estimate the lumped efficiencies as  $\eta_1 \simeq \eta_2 = 2.26 \pm 0.03\%$ .

We performed full quantum state tomography [27] on the two-photon states in the type-0 and type-2 configurations (see the Supplementary Information for the details of the tomography measurements and density matrix reconstruction). Due to the higher-photon fluxes (see Fig. 3), the type-0 experiments facilitated the calibration of the measurement setup in preparation for measuring and characterizing the entanglement of type-2-generated photon pairs. Figs. 4 (a) and (b) show the results of the reconstructed density matrix. These were measured with 20-minute integration times, and coincidence rates of 13.92 Hz and 2.27 Hz for the type-0 and type-2 sources,

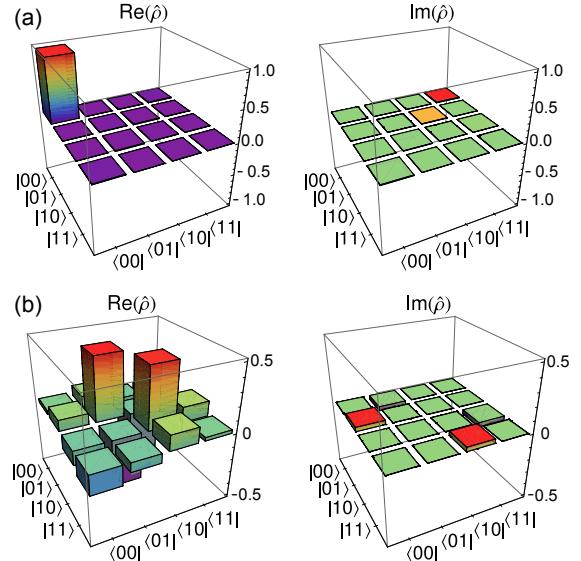

**FIG. 4. Density matrix reconstruction:** The real ( $\text{Re}$ ) and imaginary ( $\text{Im}$ ) parts of the reconstructed density matrices of the generated state  $\hat{\rho}_0^{\text{exp}}$  and  $\hat{\rho}_2^{\text{exp}}$  measured by quantum state tomography [26] using the setup in Fig. 2 for (a) type-0 SPDC source (b) type-2 SPDC source, respectively. Here “0”  $\equiv |V\rangle$  and “1”  $\equiv |H\rangle$ .

respectively. The highest-fidelity pure state corresponding to the reconstructed density matrix for each case is

$$\begin{aligned} |\psi\rangle_0^{\text{exp}} &\simeq 0.99|V, V\rangle + 0.14|H, H\rangle, \text{ and} \\ |\psi\rangle_2^{\text{exp}} &\simeq (0.18 + 0.04i)|V, V\rangle + (0.68 + 0.07i)|V, H\rangle \\ &\quad - (0.68 + 0.09i)|H, V\rangle - 0.18|H, H\rangle \end{aligned} \quad (1)$$

for type-0 and type-2 SPDC, respectively. The fidelities [28] of the reconstructed density matrix states with the ideal  $|V, V\rangle$  and  $|\psi^-\rangle$  states are  $\mathcal{F}_0 = 99.47\%$  and  $\mathcal{F}_2 = 83.13\%$ , while the state purities [ $\mathcal{P}_{0(2)} = \text{Tr}(\rho_{0(2)}^2)$ ] were  $\mathcal{P}_0 = 99.01\%$  and  $\mathcal{P}_2 = 82.55\%$  for type-0 and type-2, respectively.

While an entangled state was achieved previously [18], a state sufficiently entangled to result in a positive secure key rate for DIQKD has not been demonstrated. To evaluate the suitability of our source for quantum information and communication protocols such as DIQKD and randomness generation, we quantify the entanglement produced from the type-2 SPDC, using the most common entanglement measures/witnesses. Of these, the most relevant for DIQKD is the CHSH-Bell parameter, since the lower bound on the secure key rate is given as [16, 17]

$$\mathcal{R} = 1 - h(\mathcal{E}) - h\left(\frac{1 + \sqrt{(S/2)^2 - 1}}{2}\right) \quad (2)$$

where  $h$  is the binary entropy and  $\mathcal{E}$  is the QBER. The CHSH-Bell parameter  $S$  can be computed from the den-

sity matrix  $\rho$  as

$$S = \text{Tr}(\rho \hat{S}). \quad (3)$$

Where  $\hat{S}$  is the Bell operator [29–31] corresponding to the CHSH-Bell inequality.  $\mathcal{R}$  is a lower bound on the secure key rate which depends explicitly on  $S$  and  $\mathcal{E}$ , which, in turn, are both degraded by noise (e.g., the solar background flux), the number of photons per pulse  $\mu$  and efficiency  $\eta$ , as seen in Fig. 1.

The CHSH-Bell inequality violation computed from the measured density matrix shown in Fig. 4 is  $S = 2.695 \pm 0.028$  ( $S = 2\sqrt{2} \approx 2.828$  for a maximally entangled state [32]), which is a violation of the Bell inequality  $S \leq 2$  by 23 standard deviations—an order of magnitude improvement over the state of the art [18]. This is close to the theoretical maximum violation possible from this density matrix, which by using the method in Ref [33], is  $S = 2.709$ .

We also determine the QBER,

$$\mathcal{E} = \text{Tr}(\rho|H, H\rangle\langle H, H|) + \text{Tr}(\rho|V, V\rangle\langle V, V|), \quad (4)$$

to be 5.43%. Using Eq. (2), this gives the lower bound on the secure key rate as  $\mathcal{R} = 0.417$  bits/pair. Based on a coincidence detection rate of 2.27 Hz, this corresponds to 0.95 secure bits/s at 2.1  $\mu\text{m}$ . Although this secure-key rate may seem low, it is competitive when the two-photon rate is taken into consideration. While it is not easy to make a direct comparison, we can put our result into perspective by considering the realization in Ref. [10] in which a maximum secure key rate of 0.43 bits/s was achieved over a long distance at a mature wavelength of 1550 nm. There, the two-photon rate was 2 Hz, yielding 0.215 secure bits per detected photon pair. In our experiment we estimate 0.417 secure bits per detected pair, which seems promising for a first demonstration in a new waveband.

Using the results of from Ref. [34], we obtain a lower bound on the entanglement present in the state as measured by entanglement of formation and concurrence [35] of  $E_F = 0.6746$  and  $\mathcal{C} = 0.7642$ , respectively. These are widely studied measures of entanglement of a general bipartite quantum system, which increase monotonically with the degree of entanglement in the state. The concurrence is 0 for a separable state and 1 for a maximally entangled state. We note here that these conclusions rely on the assumption that the state being measured is a two-qubit state, hence, they are not fully device independent. A fully device-independent conclusion which certifies that the state can be locally processed to obtain a state that approaches a singlet state can be obtained using the results in [36]. In fact, the threshold violation for which the self-testing bound becomes non-trivial is  $S^* = (16 + 14\sqrt{2}/17) \approx 2.11$ , and with  $S = 2.695 > S^*$  in Eq. (7) of Ref [36], we can guarantee that, up to local operations, the lower bound on the singlet fidelity is

90.8%, demonstrating a fully device-independent certification of the two-photon state generated at 2.1  $\mu\text{m}$ .

We further exploit the quality of the entangled state and the measurement capabilities to demonstrate a previously unexplored quantum application—a weak form of self-testing recently derived in Ref. [23]. Self-testing [37–39] is a means for DI characterization of quantum devices by a classical user solely on the basis of observed non-local correlations, without requiring any assumptions about the devices under test [40]. Traditionally, this is based on the violation of so-called ‘rigid’ [41] Bell inequalities such as the CHSH. Self-testing with such inequalities is rigid in the sense that it certifies both the quantum state measured and the measurement implemented by the device. The weak form of self-testing [23], which has not yet been addressed experimentally, now makes it possible to certify the quantum state without full determination of the measurements. This is an important result for DI quantum applications. Based on the violation of the three-setting inequality, we demonstrate that we have a two-qubit state which exhibits a violation of the  $\alpha = 1$  inequality of 4.7747 (local bound is 4). This allows us to conclude that no pair of observables used in the experiment commute (i.e., we have a fully non-trivial incompatibility structure).

In conclusion, we have demonstrated how quantum technologies in the mid-infrared region have now reached the maturity level which enables the generation, manipulation, and full tomography of highly entangled quantum states. We have confirmed that this state could be used for device-independent randomness generation or quantum key distribution (or possibly other cryptographic tasks), and as examples, we have computed the secure key rate for DIQKD. This represents a significant step towards DI quantum information and communication protocols in this waveband. For example, DIQKD during daytime could be realized by harnessing the low solar background within the 2.1- $\mu\text{m}$  window. Together with recently developed techniques for satellite-to-ground entanglement distribution and QKD [8, 9], our approach could lead to the future development of a new generation of metropolitan quantum networks. Moreover, the recent development of hollow core fibres [42–44] and GHz-bandwidth switching devices in the 2- $\mu\text{m}$  band [45] could further extend the applicability in full scale DIQKD implementations, and allow distribution of entangled photons over large distances between nodes through fiber optic networks. Our results further lay the foundations for advanced quantum technologies in the mid-infrared spectral region.

**Acknowledgements:** ACD acknowledges support from the EPSRC, Impact Acceleration Account (EP/R511705/1). MC and ACD acknowledge the support from the UK Research and Innovation (UKRI) and the UK Engineering and Physical Sciences Research Council (EPSRC) Fellowship (“In-

“Tempo” EP/S001573/1). JK acknowledges support from the project “Robust certification of quantum devices” carried out within the HOMING programme of the Foundation for Polish Science co-financed by the European Union under the European Regional Development Fund. RHH acknowledges support from the EPSRC Quantum Communications hub EP/T001011/1. DF is supported by the Royal Academy of Engineering under the Chairs in Emerging Technologies scheme.

\* Adetunmise.Dada@glasgow.ac.uk

- [1] N. Gisin, G. Ribordy, W. Tittel, and H. Zbinden. “Quantum cryptography”, *Reviews of Modern Physics* **74**, 145 (2002).
- [2] P. G. Kwiat. “Focus on quantum cryptography”, *New Journal of Physics* **4** (2002).
- [3] N. Lütkenhaus and A. Shields. “Focus on quantum cryptography: theory and practice”, *New Journal of Physics* **11**, 045005 (2009).
- [4] C. H. Bennett and S. J. Wiesner. “Communication via one- and two-particle operators on Einstein-Podolsky-Rosen states”, *Phys. Rev. Lett.* **69**, 2881 (1992).
- [5] C. H. Bennett, G. Brassard, C. Crépeau, R. Jozsa, A. Peres, and W. K. Wootters. “Teleporting an unknown quantum state via dual classical and Einstein-Podolsky-Rosen channels”, *Phys. Rev. Lett.* **70**, 1895 (1993).
- [6] T. Jennewein, C. Simon, G. Weihs, H. Weinfurter, and A. Zeilinger. “Quantum Cryptography with Entangled Photons”, *Phys. Rev. Lett.* **84**, 4729 (2000).
- [7] R. Ursin, F. Tiefenbacher, T. Schmitt-Manderbach, H. Weier, T. Scheidl, M. Lindenthal, B. Blauensteiner, T. Jennewein, J. Perdigues, P. Trojek, *et al.* “Entanglement-based quantum communication over 144 km”, *Nature Physics* **3**, 481 (2007).
- [8] S.-K. Liao, W.-Q. Cai, W.-Y. Liu, L. Zhang, Y. Li, J.-G. Ren, J. Yin, Q. Shen, Y. Cao, Z.-P. Li, F.-Z. Li, X.-W. Chen, L.-H. Sun, J.-J. Jia, J.-C. Wu, X.-J. Jiang, J.-F. Wang, Y.-M. Huang, Q. Wang, Y.-L. Zhou, L. Deng, T. Xi, L. Ma, T. Hu, Q. Zhang, Y.-A. Chen, N.-L. Liu, X.-B. Wang, Z.-C. Zhu, C.-Y. Lu, R. Shu, C.-Z. Peng, J.-Y. Wang, and J.-W. Pan. “Satellite-to-ground quantum key distribution”, *Nature* **549**, 43 (2017).
- [9] S.-K. Liao, W.-Q. Cai, J. Handsteiner, B. Liu, J. Yin, L. Zhang, D. Rauch, M. Fink, J.-G. Ren, W.-Y. Liu, Y. Li, Q. Shen, Y. Cao, F.-Z. Li, J.-F. Wang, Y.-M. Huang, L. Deng, T. Xi, L. Ma, T. Hu, L. Li, N.-L. Liu, F. Koidl, P. Wang, Y.-A. Chen, X.-B. Wang, M. Steindorfer, G. Kirchner, C.-Y. Lu, R. Shu, R. Ursin, T. Scheidl, C.-Z. Peng, J.-Y. Wang, A. Zeilinger, and J.-W. Pan. “Satellite-Relayed Intercontinental Quantum Network”, *Phys. Rev. Lett.* **120**, 030501 (2018).
- [10] J. Yin, Y.-H. Li, S.-K. Liao, M. Yang, Y. Cao, L. Zhang, J.-G. Ren, W.-Q. Cai, W.-Y. Liu, S.-L. Li, R. Shu, Y.-M. Huang, L. Deng, L. Li, Q. Zhang, N.-L. Liu, Y.-A. Chen, C.-Y. Lu, X.-B. Wang, F. Xu, J.-Y. Wang, C.-Z. Peng, A. K. Ekert, and J.-W. Pan. “Entanglement-based secure quantum cryptography over 1,120 kilometres”, *Nature* **582**, 501 (2020).
- [11] Y.-A. Chen, Q. Zhang, T.-Y. Chen, W.-Q. Cai, S.-K. Liao, J. Zhang, K. Chen, J. Yin, J.-G. Ren, Z. Chen, S.-L. Han, Q. Yu, K. Liang, F. Zhou, X. Yuan, M.-S. Zhao, T.-Y. Wang, X. Jiang, L. Zhang, W.-Y. Liu, Y. Li, Q. Shen, Y. Cao, C.-Y. Lu, R. Shu, J.-Y. Wang, L. Li, N.-L. Liu, F. Xu, X.-B. Wang, C.-Z. Peng, and J.-W. Pan. “An integrated space-to-ground quantum communication network over 4,600 kilometres”, *Nature* **589**, 214 (2021).
- [12] S.-K. Liao, H.-L. Yong, C. Liu, G.-L. Shentu, D.-D. Li, J. Lin, H. Dai, S.-Q. Zhao, B. Li, J.-Y. Guan, W. Chen, Y.-H. Gong, Y. Li, Z.-H. Lin, G.-S. Pan, J. S. Pelc, M. M. Fejer, W.-Z. Zhang, W.-Y. Liu, J. Yin, J.-G. Ren, X.-B. Wang, Q. Zhang, C.-Z. Peng, and J.-W. Pan. “Long-distance free-space quantum key distribution in daylight towards inter-satellite communication”, *Nature Photonics* **11**, 509 (2017).
- [13] M. Avesani, L. Calderaro, M. Schiavon, A. Stanco, C. Agnesi, A. Santamato, M. Zahidy, A. Scriminich, G. Folotto, G. Contestabile, M. Chiesa, D. Rotta, M. Artiglia, A. Montanaro, M. Romagnoli, V. Sorianello, F. Vedovato, G. Vallone, and P. Villoresi. “Full daylight quantum-key-distribution at 1550 nm enabled by integrated silicon photonics”, *npj Quantum Information* **7**, 93 (2021).
- [14] P. Roberts, F. Couny, H. Sabert, B. Mangan, D. Williams, L. Farr, M. Mason, A. Tomlinson, T. Birks, J. Knight, *et al.* “Ultimate low loss of hollow-core photonic crystal fibres”, *Optics Express* **13**, 236 (2005).
- [15] A. S. for Testing, M. C. E. on Space Simulation, and A. of Space Technology, *Standard Solar Constant and Zero Air Mass Solar Spectral Irradiance Tables* (ASTM International, 2006).
- [16] S. Pironio, A. Acín, N. Brunner, N. Gisin, S. Massar, and V. Scarani. “Device-independent quantum key distribution secure against collective attacks”, *New Journal of Physics* **11**, 045021 (2009).
- [17] A. Acín, N. Brunner, N. Gisin, S. Massar, S. Pironio, and V. Scarani. “Device-independent security of quantum cryptography against collective attacks”, *Phys. Rev. Lett.* **98**, 230501 (2007).
- [18] S. Prabhakar, T. Shields, A. C. Dada, M. Ebrahim, G. G. Taylor, D. Morozov, K. Erotopritou, S. Miki, M. Yabuno, H. Terai, *et al.* “Two-photon quantum interference and entanglement at 2.1  $\mu\text{m}$ ”, *Science Advances* **6**, eaay5195 (2020).
- [19] G. G. Taylor, D. Morozov, N. R. Gemmell, K. Erotopritou, S. Miki, H. Terai, and R. H. Hadfield. “Photon counting LIDAR at 2.3  $\mu\text{m}$  wavelength with superconducting nanowires”, *Optics Express* **27**, 38147 (2019).
- [20] C. Bennett. “Quantum cryptography: public key distributions and coin tossing”, *Theor. Comput. Sci.* **560**, 7 (2014).
- [21] A. K. Ekert. “Quantum cryptography based on Bell’s theorem”, *Phys. Rev. Lett.* **67**, 661 (1991).
- [22] L. M. Rosenfeld, D. A. Sulway, G. F. Sinclair, V. Anant, M. G. Thompson, J. G. Rarity, and J. W. Silverstone. “Mid-infrared quantum optics in silicon”, *Optics Express* **28**, 37092 (2020).
- [23] J. m. k. Kaniewski. “Weak form of self-testing”, *Phys. Rev. Research* **2**, 033420 (2020).
- [24] W. T. Buttler, R. J. Hughes, S. K. Lamoreaux, G. L. Morgan, J. E. Nordholt, and C. G. Peterson. “Daylight Quantum Key Distribution over 1.6 km”, *Phys. Rev. Lett.* **84**, 5652 (2000).
- [25] K.-i. Harada, H. Takesue, H. Fukuda, T. Tsuchizawa,

- T. Watanabe, K. Yamada, Y. Tokura, and S.-i. Itabashi. “Frequency and polarization characteristics of correlated photon-pair generation using a silicon wire waveguide”, IEEE Journal of Selected Topics in Quantum Electronics **16**, 325 (2009).
- [26] D. F. V. James, P. G. Kwiat, W. J. Munro, and A. G. White. “Measurement of qubits”, Phys. Rev. A **64**, 052312 (2001).
- [27] D. F. V. James, P. G. Kwiat, W. J. Munro, and A. G. White. “Measurement of qubits”, Phys. Rev. A **64**, 052312 (2001).
- [28] R. Jozsa. “Fidelity for mixed quantum states”, Journal of modern optics **41**, 2315 (1994).
- [29] S. L. Braunstein and A. Mann. “Measurement of the Bell operator and quantum teleportation”, Phys. Rev. A **51**, R1727 (1995).
- [30] S. L. Braunstein, A. Mann, and M. Revzen. “Maximal violation of Bell inequalities for mixed states”, Phys. Rev. Lett. **68**, 3259 (1992).
- [31] A. Acín, T. Durt, N. Gisin, and J. I. Latorre. “Quantum nonlocality in two three-level systems”, Phys. Rev. A **65**, 052325 (2002).
- [32] Cirel'son. “Quantum generalizations of Bell's inequality”, Letters in Mathematical Physics **4**, 93 (1980).
- [33] R. Horodecki, P. Horodecki, and M. Horodecki. “Violating Bell inequality by mixed spin-1/2 states: necessary and sufficient condition”, Physics Letters A **200**, 340 (1995).
- [34] F. Verstraete and M. M. Wolf. “Entanglement versus Bell Violations and Their Behavior under Local Filtering Operations”, Phys. Rev. Lett. **89**, 170401 (2002).
- [35] S. Hill and W. K. Wootters. “Entanglement of a Pair of Quantum Bits”, Phys. Rev. Lett. **78**, 5022 (1997).
- [36] J. Kaniewski. “Analytic and nearly optimal self-testing bounds for the Clauser-Horne-Shimony-Holt and Mermin inequalities”, Phys. Rev. Lett. **117**, 070402 (2016).
- [37] D. Mayers and A. Yao, in *Proceedings of the 39th Annual Symposium on Foundations of Computer Science*, Vol. 1 (IEEE Computer Society Press, Piscataway, New Jersey, US, 1998) p. 503.
- [38] D. Mayers and A. Yao. “Self testing quantum apparatus”, Quantum. Inf. Comput., 273 (2004).
- [39] I. Šupić and J. Bowles. “Self-testing of quantum systems: a review”, Quantum **4**, 337 (2020).
- [40] A. Coladangelo, K. T. Goh, and V. Scarani. “All pure bipartite entangled states can be self-tested”, Nature communications **8**, 1 (2017).
- [41] B. W. Reichardt, F. Unger, and U. Vazirani. “Classical command of quantum systems”, Nature **496**, 456 (2013).
- [42] G. T. Jasion, T. D. Bradley, K. Harrington, H. Sakr, Y. Chen, E. N. Fokoua, I. A. Davidson, A. Taranta, J. R. Hayes, D. J. Richardson, et al., in *Optical Fiber Communication Conference* (Optical Society of America, 2020) pp. Th4B-4.
- [43] Z. Liu, Y. Chen, Z. Li, B. Kelly, R. Phelan, J. O'Carroll, T. Bradley, J. P. Wooler, N. V. Wheeler, A. M. Heidt, et al.. “High-capacity directly modulated optical transmitter for 2- $\mu\text{m}$  spectral region”, Journal of Lightwave Technology **33**, 1373 (2015).
- [44] A. Taranta, E. N. Fokoua, S. A. Mousavi, J. Hayes, T. Bradley, G. Jasion, and F. Poletti. “Exceptional polarization purity in antiresonant hollow-core optical fibres”, Nature Photonics **14**, 504 (2020).
- [45] W. Cao, D. Hagan, D. J. Thomson, M. Nedeljkovic, C. G. Littlejohns, A. Knights, S.-U. Alam, J. Wang, F. Gardes, W. Zhang, et al.. “High-speed silicon modulators for the 2  $\mu\text{m}$  wavelength band”, Optica **5**, 1055 (2018).

**Supplementary Material for  
“Near-maximal two-photon entanglement for quantum communications at 2.1 μm”**

**Density matrix reconstruction**

The two-qubit density matrix can be decomposed as

$$\hat{\rho} = \frac{1}{4} \sum_{i,j=0}^3 T_{i,j} \sigma_i \otimes \sigma_j. \quad (\text{S1})$$

Here,  $\sigma_0$  is the  $2 \times 2$  identity matrix;  $\sigma_1, \sigma_2, \sigma_3$ , are the Pauli-X, Y and Z matrices, respectively; and  $T_{i,j} \equiv S_i \otimes S_j$ ; where  $S_{i(j)}$ , ( $i, j = \{0, 1, 2, 3\}$ ) are defined as

$$\begin{aligned} S_0 &= P(|H\rangle) + P(|V\rangle) \\ S_1 &= P(|D\rangle) - P(|A\rangle) \\ S_2 &= P(|L\rangle) - P(|R\rangle) \\ S_3 &= P(|H\rangle) - P(|V\rangle). \end{aligned} \quad (\text{S2})$$

The probabilities  $P(|\psi\rangle) \equiv \text{Tr}(\rho|\psi\rangle\langle\psi|)$ , such that

$$\begin{aligned} T_{0,0} &= S_0 \otimes S_0 \equiv P(|H, H\rangle) + P(|H, V\rangle) + P(|V, H\rangle) + P(|V, V\rangle) \\ T_{0,1} &= S_0 \otimes S_1 \equiv P(|H, D\rangle) - P(|H, A\rangle) + P(|V, D\rangle) - P(|V, A\rangle), \text{ e.t.c.} \end{aligned} \quad (\text{S3})$$

The probabilities  $P(X, Y)$  (where  $X, Y = H, V, A, D, L, R$ ) are obtained from coincidence measurements taken when the signal and idler photons are projected to states  $|X\rangle$  and  $|Y\rangle$  respectively, i.e.,  $C(X, Y)$ .